

6 W126M



Not contractual picture

4 stroke diesel engine, direct injection

Bore and stroke
Number of cylinders
Total displacement
Compression ratio
Engine rotation (ISO 1204 standard)
Idle speed
Weight (without water & oil)
Flywheel housing
Flywheel

126 x 155 mm
6 in line
11.6 litres
17/1
CCW *
600 rpm
1200 kg
SAE 1
SAE 14"

* counter-clockwise

RATED POWER

Duty	rpm	kW	hp	Peak torque / speed (N.m / rpm)	Full load fuel consumption (g / kW.h)	IMO	CCNR
P1	1800	294	400	1914 / 1000	200	II	II
P2	2100	331	450	2004 / 1200	210	II	II

STANDARD EQUIPMENTS

Engine and block

Cast iron cylinder block, with replaceable cylinder liners
Separate cast iron cylinder heads equipped with 4 valves
Replaceable valves guides and seats
Steel forged crankshaft with 7 bearings
Lube oil cooled light alloy piston with 3 high performance piston rings

Cooling system

Fresh / raw water heat exchanger with integrated thermostatic valves and expansion tank
Cast iron centrifugal fresh water pump, mechanically driven
Bronze self-priming raw water pump, mechanically driven

Lubrication system

Full flow duplex type oil filters
Fresh water cooled lube oil cooler

Fuel system

In line injection pump with flanged mechanical governor
Double wall injection bundle
Duplex fuel filters replaceable engine running
Water separator

Intake air and exhaust system

Insulated exhaust gas manifold
Turbo blower with insulated turbine housing
Low water temperature cooled intake air cooler

Electrical system

Voltage: 24Vcc
Electrical starter on flywheel crown
35A battery charger

OPTIONAL EQUIPMENTS (extracts) *

Cooling system adapted for box / keel cooling
Connection for emergency raw water circuit
Bilge pump
Air starter

Free end PTO
Resilient mounts under engine
Exhaust water injection after turbocharger

* contact us for further information regarding our options.

Power definition

Standard ISO 3046/1 - 1995 (F)

Reference conditions

Ambiant temperature	25 °C / 77 °F
Barometric pressure	100 kPa
Relative humidity	30 %
Raw water temperature	25 °C / 77 °F

Limit conditions ISO 3046

Fuel oil

Relative density	0,840 ± 0,005
Lower calorific power	42 700 kJ/kg
Consumption tolerances	0 ± 5 %
Inlet limit temperature	35 °C / 95 °F

Our ratings also comply with classification societies maximum temperature definition without power derating.

Ambiente temperature	45 °C / 113 °F
Raw water temperature	32 °C / 90 °F

	P1 duty	P2 duty
Application	unrestricted continuous	continuous
Engine load variations	very little or none	numerous
Mean engine load factor	80 to 100 %	30 to 80 %
Annual working time	more than 5000 h	3000 to 5000 h
Time at full load	unlimited	8 h each 12 h



P1 typical applications

deep sea trawlers, shrimps trawlers, sea going tug boats, river tug boats, push boats, freighters, dredges, LCT, ferries

P2 typical applications


passengers vessels, harbour tug boats, motorbarges, coastal freighters, tuna boats, seiners, netters, potting boats, longliners, buoyers, supply vessels, oceanographic research vessels, commercial pleasure crafts

DIMENSIONS

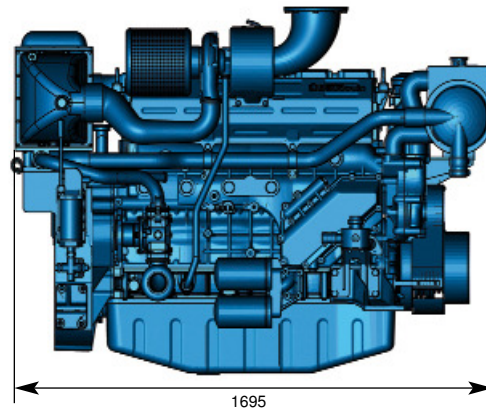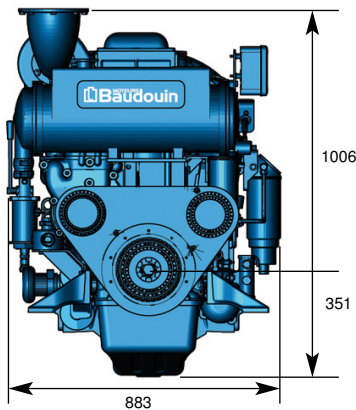

PERFORMANCES

P1 rating - 294 kW / 400 hp @ 1800 rpm

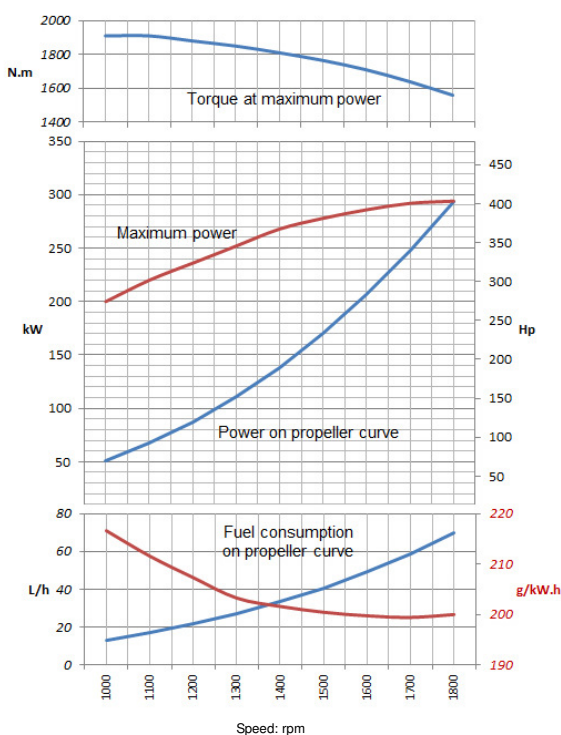

P2 rating - 331 kW / 450 hp @ 2100 rpm

